



Information for rail (un)loading at Standic Antwerpen

Terminal information:

Standic Antwerpen B.V.

Beliweg 3, Port 321

2030 Antwerp, Belgium



Phone: +32(0)33615055

Email: cse-antwerpen@standic.com

The Railway Station Code (UIC & DIUM) is: **(88) 287953 ANTWERPEN-D.S.-ALASKA STANDIC K321** (abbreviation code: AAL STA)

Weighbridge specifications:


- Length of weighbridge is 15 meters (= maximum wheelbase)
- Width of weighbridge is 4.30 meters
- Maximum weight on weighbridge is 100tons

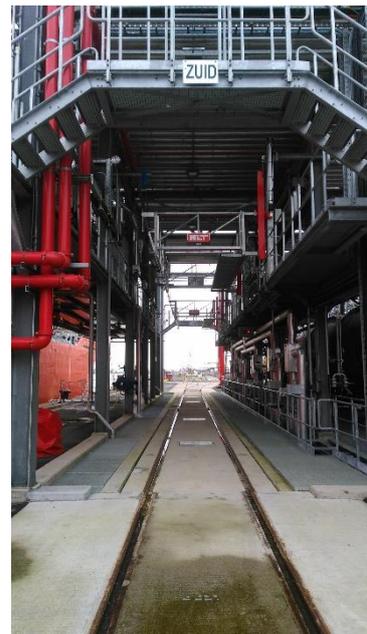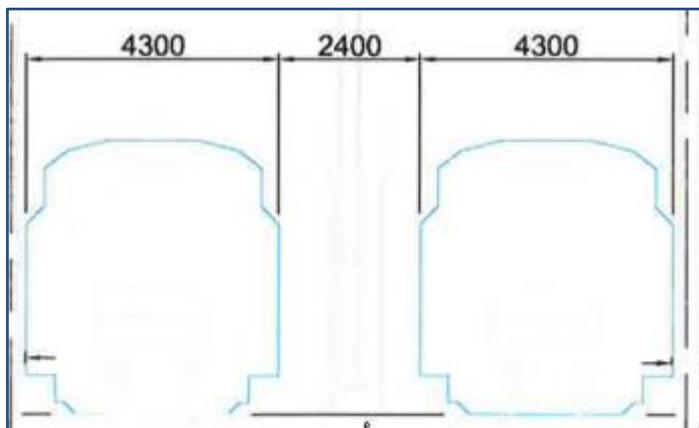

Connections:

2x manlid DN500 (single compartment)





Bottom outlet:

4", footvalve hydraulically or manually operated, with dual connection DN100



Pressure- / Vapour connection:

DN50 (2x) of DN80 (2x) on top of recipient with manual valve.



Superstructure and accessories

Walkways 600mm wide

Dangerous goods placards holders

Steam heating

7 half tubes stainless steel

MAWP: 6 bar/Test pressure: 9 bar

Inlet and outlet: DN50

Temperature gauge (dual)

Insulation + GRP cladding

Steam coupling Dixon Boss NPSM $\frac{3}{4}$ "-1"

Approval

CSC, UIC

ADN / ADR / RID (L4BH)

Railway codification



Terminal overview (purple = rail connection):

